

1. Description

KH3144 is fabricated from Bipolar technology. It incorporates Hall effect plate, voltage regulator, reverse voltage protector, signal amplifiers, Schmitt trigger circuits, and transistor open-collector output drivers. ES3144 has a wide working voltage range and a wide range of operating temperatures, it is very suitable for being used as solid state electrical switch in automotive, industrial electrical and electrical home appliances products.



KH3144 has a tiny SOT-23 3L package and a single in-line TO-92S 3L (flat) package, both are RoHS compliant packages.

For TO-92S package, when the S pole faces the marked side of the package and the magnetic field perpendicular to the Hall sensor exceeds the operate point threshold (B_{OP}) (that is $B > B_{OP} > 0$), the output transistor turns on, and the voltage is low. When the magnetic field is reduced below the release point (B_{RP}) (that is $0 < B < B_{RP}$), the output transistor turns off, and the voltage goes high. It can't trigger the chip to work when the N pole faces the marked side of the package, but it can turn it on when the N pole faces the opposite side of the marked side of the package. The SOT-23 device is reversed from the TO-92S package, it needs the N pole to work on the marked side of the package.

2. Features

- ◆ Reverse voltage protector in-built
- ◆ Wide operating voltage range from 4.5V to 24V
- ◆ High sensitivity, fast reaction
- ◆ Wide operating temperature range from -25°C to 85°C
- ◆ High reliability, miniature, ultrathin package


3. Applications

- ◆ Limit switch
- ◆ Current limit
- ◆ Rotation rate measurement
- ◆ Current sensor
- ◆ Magnetic location proximity switch


Unipolar Hall Effect Switch

KH3144


4. Functional Block Diagram

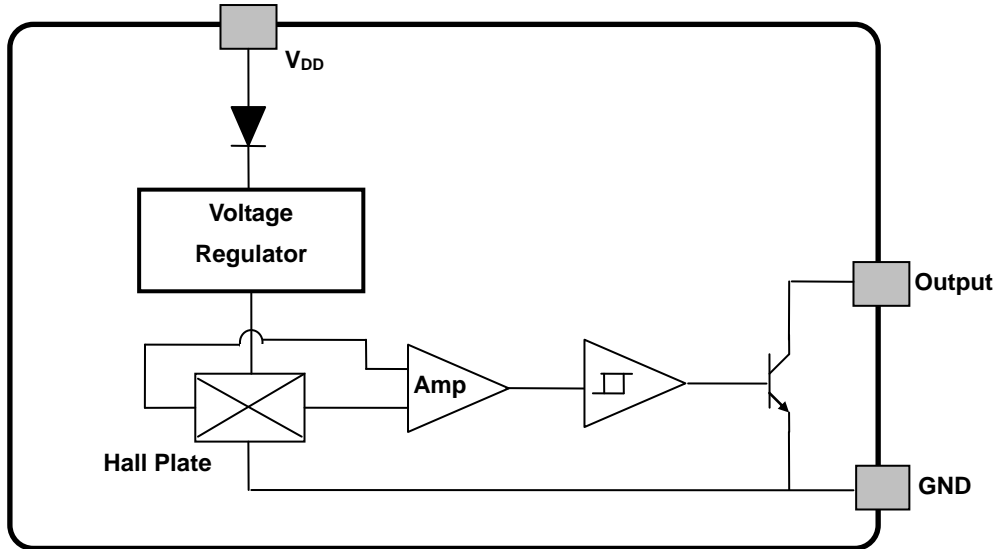

5. Pin Definitions



TO-92S Package
 Pin1 - V_{DD}
 Pin2 - GND
 Pin3 - Output



SOT-23 Package
 Pin1 - V_{DD}
 Pin2 - Output
 Pin3 - GND

Name	P/I/O	Pin #		Descriptions
		TO-92S Package	SOT-23 Package	
V _{DD}	P	1	1	Supply Voltage
GND	P	2	3	Ground
Output	O	3	2	Output

Unipolar Hall Effect Switch
KH3144
6. Absolute Maximum Ratings

Parameter	Symbol	Value	Units	
Supply Voltage	V_{DD}	24	V	
Reverse Voltage	V_{DD}	24	V	
Output Voltage	V_{OUT}	30	V	
Output Current	I_{OUT}	25	mA	
Magnetic Flux Density	B	No Limit		
Operating Temperature Range	T_A	-25 ~ 85	°C	
Storage Temperature Rang	T_S	-65 ~ 150	°C	
Maximum Junction Temperature	T_J	+150	°C	
Lead Temperature (Soldering, 5 sec)		+250	°C	
Package Power Dissipation	P_D	TO-92S	550	mW
		SOT23-3L	230	mW

Note: Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute-maximum rated conditions for extended periods may affect device reliability.

7. DC Electrical Characteristics


DC Operating Parameters: $T_A = 25^\circ\text{C}$, $V_{DD} = 12V_{DC}$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Operating voltage	V_{DD}	Operating	4.5		24	V
Operating current	I_{DD}	$B < B_{OP}$	4	5	7	mA
Saturation voltage drop	V_{DS} (on)	$I_{OUT} = 20\text{ mA}$, $B > B_{OP}$		0.3	0.5	V
Drain current of output	I_{OFF}	$B < B_{RP}$, $V_{OUT} = 20\text{V}$		0.01	10.0	μA
Rising time of output	T_R	$V_{DD} = 12\text{V}$, $R_L = 1.1\text{K}\Omega$, $C_L = 20\text{pf}$		0.04		μs
Falling time of output	T_F	$V_{DD} = 12\text{V}$, $R_L = 1.1\text{K}\Omega$, $C_L = 20\text{pf}$		0.18	70.0	μs



8. Magnetic Characteristics

Parameter	Symbol (Test Conditions)	Min	Typ	Max	Units	
Operate point	B_{OP} ($T_A = 25^\circ\text{C}$, $V_{DD} = 12V_{DC}$)	A	75		100	Gs
		B	100		150	
		C	150		180	
Release point	B_{RP} ($T_A = 25^\circ\text{C}$, $V_{DD} = 12V_{DC}$)	A	20		70	Gs
		B	40		120	
		C	90		150	
Hysteresis	B_{HY} ($T_A = 25^\circ\text{C}$, $V_{DD} = 12V_{DC}$)	30	-50	60		


9. Magnetoelectric Transformation Characteristics

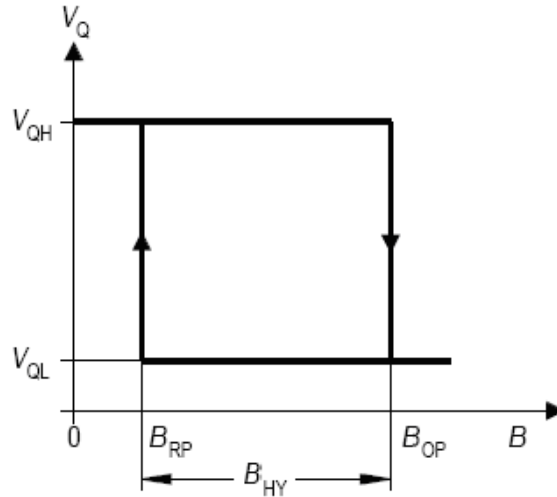


10. Performance Characteristics

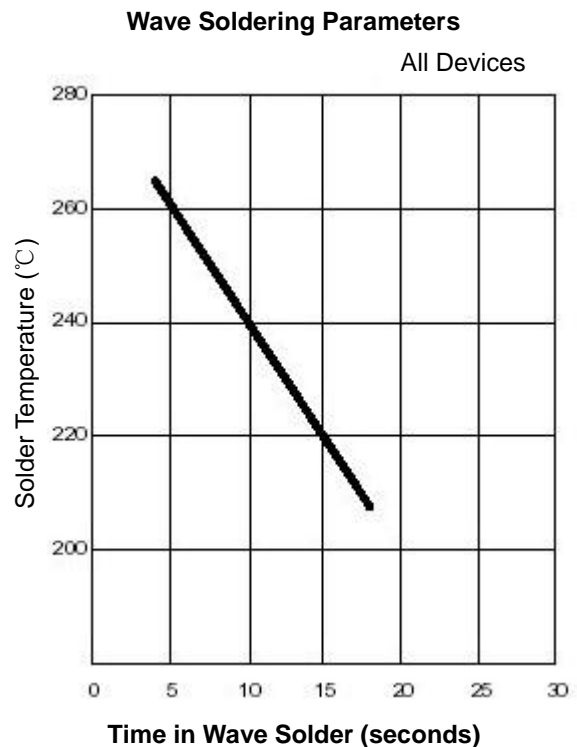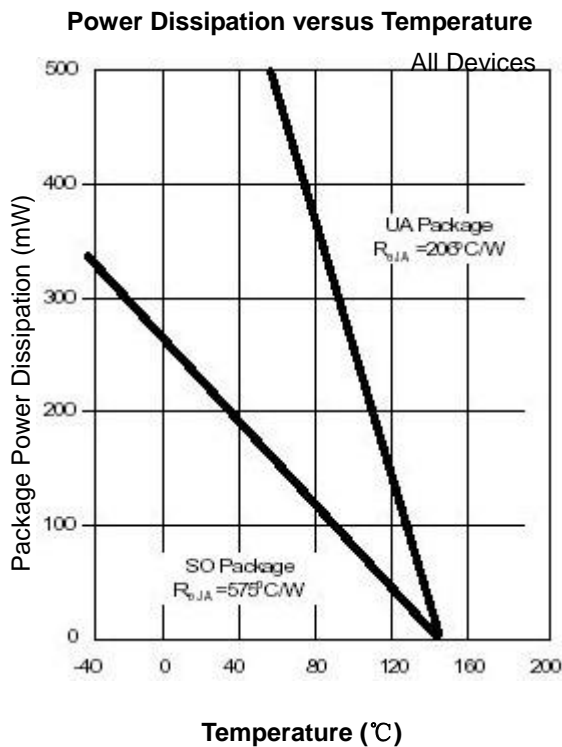

Magnetic Switch Range versus Temperature

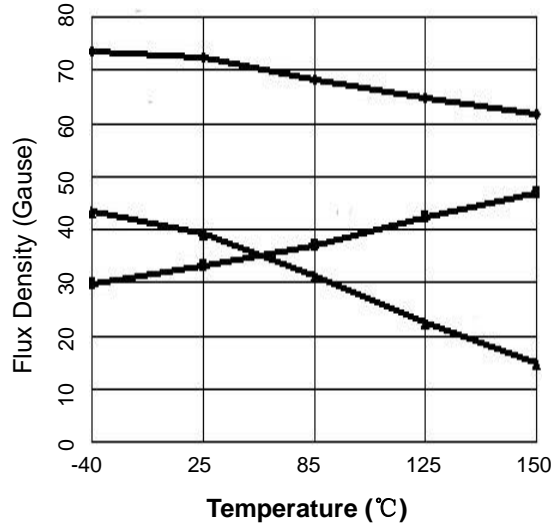

Magnetic Switch Range versus Temperature


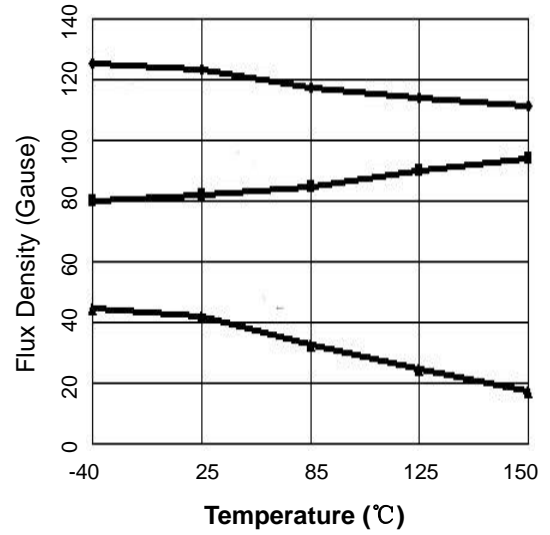


Unipolar Hall Effect Switch


KH3144

11. Package Information

11.1 UA Package (TO-92S)

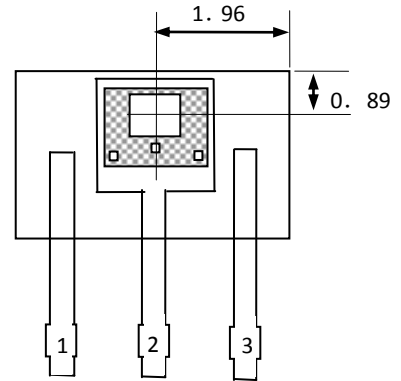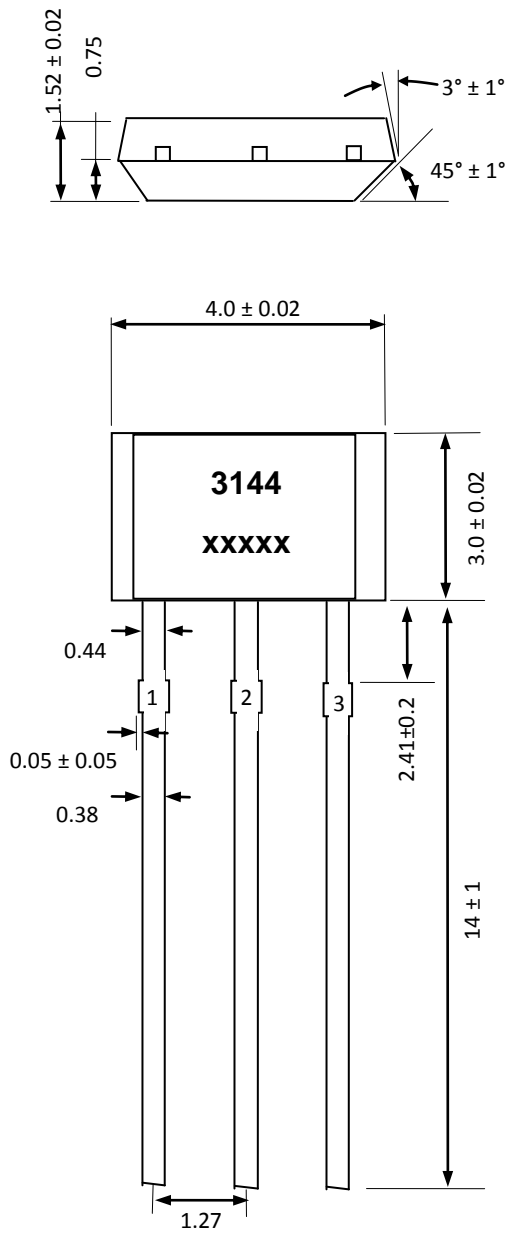

Sensor Location

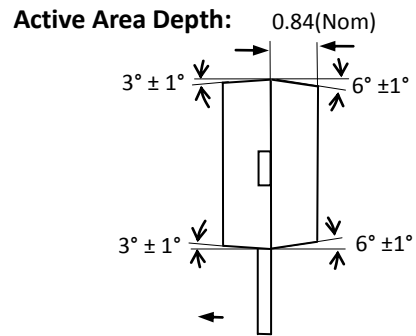

Notes:

- 1). Controlling dimension: mm;
- 2). Leads must be free of flash and plating voids;
- 3). Do not bend leads within 1 mm of lead to package interface;
- 4). PINOUT: Pin 1 V_{DD}
Pin 2 GND
Pin 3 Output


Marking:

3144 -- Code of Device (KH3144);
xxxxx -- Production Lot.;

Unipolar Hall Effect Switch

KH3144

11.2 SO Package (SOT23-3L)

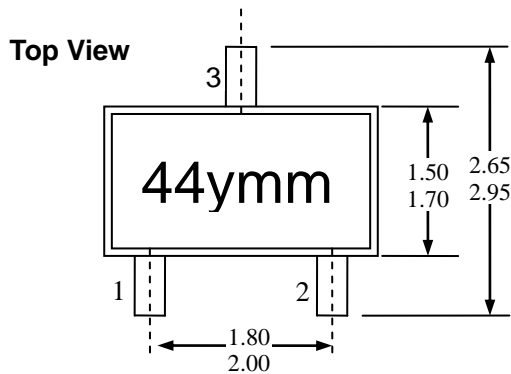


Notes:


- 1). PINOUT: Pin 1 V_{DD}
Pin 2 Output
Pin 3 GND
- 2). All dimensions are in millimeters;

Marking:



- 44 -- Code of Device (KH3144);
y -- year;
mm -- Production Lot.;

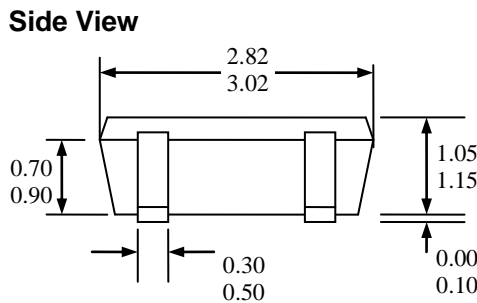

End View

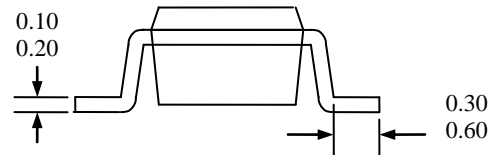

Hall plate location

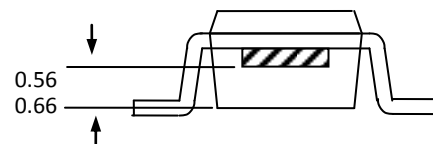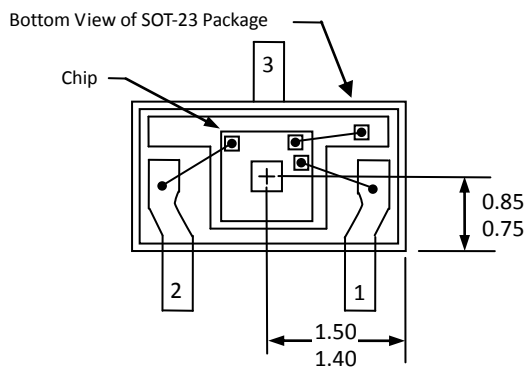

11. Ordering Information

Part No.	Package Code
KH3144	UA (TO-92S)
	SO (SOT-23)

Contact Information:

KINBOND(HONGKONG) Co., Ltd.
ADD: 9D.E room Haining Square New Road, Longhua District Shenzhen
TEL: 0755-29787905 FAX: 0755-29787906
WEB: www.kinbond.com